

REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	02/08/05	M.W.
B	UPDATED SPECS & DWG	05/12/15	JAG

SKT2224

APPLICATIONS

ET probes are used in battery charger or electronic device applications such as:


1. Camcorders
2. Circuit board to board docking stations
3. Cellular phones
4. 2-way radios
5. Computer docking stations
6. Cordless phones
7. Chargers
8. InkJet Printers
9. Notebook and laptop computers
10. AC/DC power supplies

Length = 9.27mm	Plunger C
Pitch = 1.60mm	Single Plunger

BENEFITS AND FEATURES

1. Low resistance (average 16 milliohms)
2. Better contact than nickel-plated strip contacts
3. Maintains high compliancy
4. Less susceptible to damage
5. Can accommodate up to 0.025" subsurface battery mating contact
6. Longer life than conventional interconnects

Note: Consult factory for higher temperature applications.

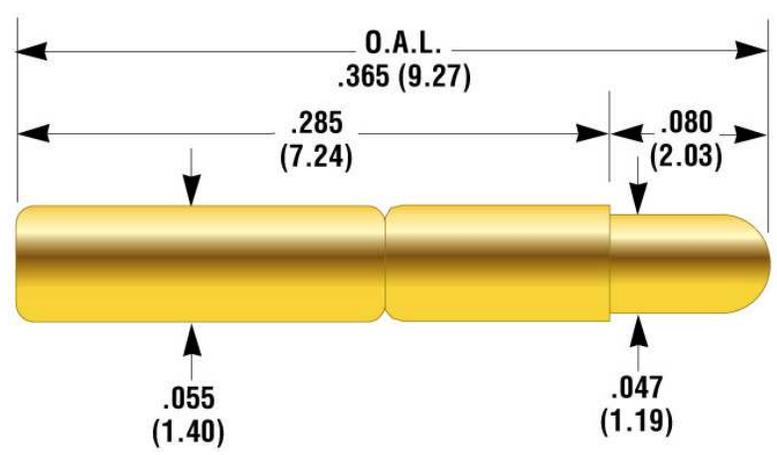

SPECIFICATIONS

PRODUCT DETAIL

Test Center:	.075 (1.91)
Recommended mounting hole size:	.053 (1.35)

MECHANICAL SPECIFICATIONS

Full Travel:	.050 (1.27)
Working Travel:	.050 (1.27)
Life Exceeds:	1M cycles
Overall Length:	.365 (9.27)

OPERATING TEMPERATURE -55° to +150°C

ELECTRICAL SPECIFICATIONS

Current Rating:	5 amps
-----------------	--------

PROBE RESISTANCE

Average Probe Resistance:	50mΩ
---------------------------	------

MATERIAL AND FINISHES

Plunger:	Heat treated beryllium copper, gold plated over hard nickel
Barrel:	Work-hardened nickel silver, gold plated over hard nickel
Spring:	Stainless steel, silver plated

SPRING FORCE in oz. (grams)

Standard:	
Preload	1.1 (31)
Working Travel	3.85 (110)

ALL DIMENSIONS ARE IN INCHES (MM) UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 VLSI and SMT ADAPTERS and ACCESSORIES

759 FLYNN ROAD
 CAMARILLO, CA 93012
 TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 02/08/05	REVISION: B	ASSEMBLY DRAWING
CHECKED: Perry Munroe	PREPARED BY: Mark Wilson	ITEM: POGO-PIN-9.27-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-9.27-1