
REV	DESCRIPTION	DATE	BY
Α	NEW DRAWING	06/01/05	H.N.
В	UPDATED DRAWING	01/26/12	JAG

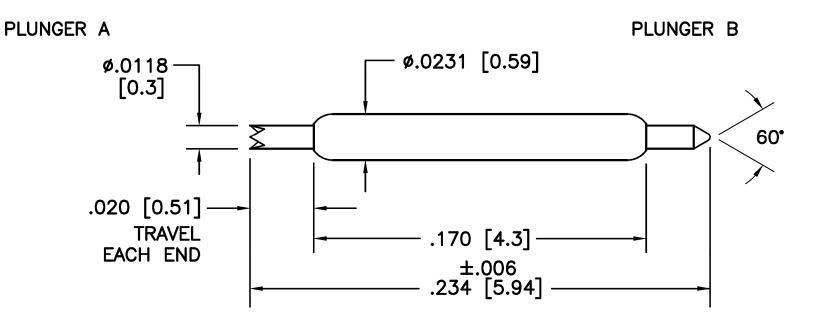

NOTES

- 1 DIMENSIONS ARE IN INCHES [MM REF]
- 2 FORCE 14 GRAMS [0.5 oz] INITIAL 32 GRAMS [1.1 OZ] AT .024 [0.61] DEFLECTION
- 3 RESISTANCE-LESS THAN 50 MILLIOHMS
- 4 MAX. CURRENT-3 AMPERES
- 5 OPERATING TEMPERATURES— -40°C (-40°F) TO 120°C (250°F)

CONTACT

PLUNGER A — HARDENED BeCu FINISH — GOLD—PLATED

PLUNGER B — HARDENED BeCu FINISH — GOLD—PLATED

BARREL - COPPER ALLOY FINISH - GOLD-PLATED

SPRING - BeCu FINISH - GOLD-PLATED

EMULATION TECHNOLOGY, INC. VLSI and SMT ADAPTERS and ACCESSORIES 759 FLYNN ROAD TEL: (805) 383-8480 CAMARILLO, CA 93012 FAX: (805) 383-8484 REVISION: SHEET: DATE: ASSEMBLY DRAWING 1 OF 1 01/26/12 CHECKED: PREPARED BY: J. GELACIO POGO-PIN-5.94-1 DESCRIPTION: DO NOT SCALE DRAWING POGO-PIN-5.94-1

ALL DIMENSIONS ARE IN INCHES [MM] UNLESS OTHERWISE SPECIFIED