


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	2/8/13	TF

SKT3879

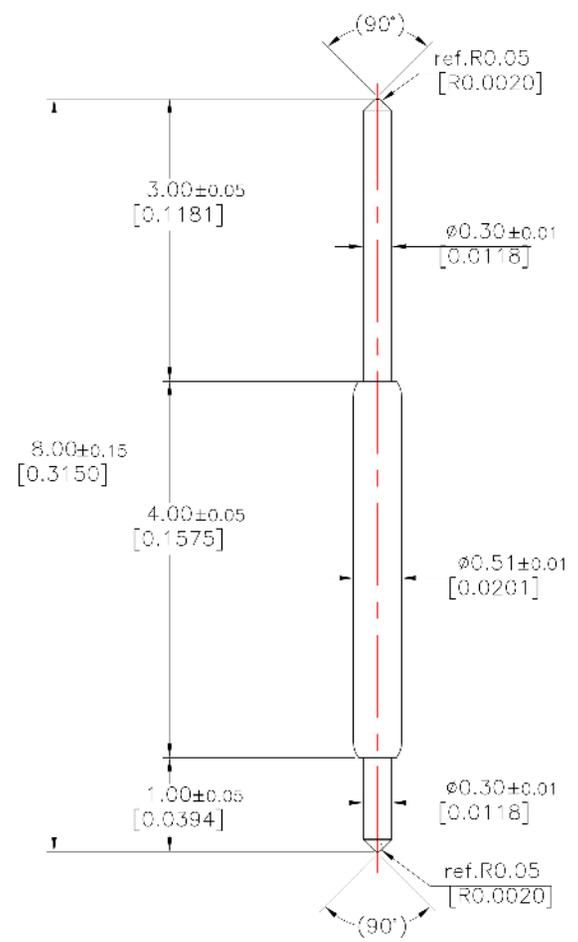

[Device side]

[Board side]

Pointing accuracy : ± 0.09mm

Unit : Millimeter[inch]

Spring force [±20%]

- 6.0g(0.213oz) at initial travel
- 30.0g(1.058oz) at 0.80mm(0.0315) recommended travel
- 37.7g(1.329oz) at 1.05mm(0.0413) full travel

Material & Finish

Plunger [Device side]	Hardened Beryllium copper	/ Gold Plated
Plunger [Board side]	Hardened Beryllium copper	/ Gold Plated
Barrel	Phosphor Bronze	/ Gold Plated
Spring	Music Wire	/ Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED			
		EMULATION TECHNOLOGY, INC. VLSI and SMT ADAPTERS and ACCESSORIES	
		759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 2/8/13	REVISION: A	ASSEMBLY DRAWING
CHECKED:	PREPARED BY: T. FOOTE	ITEM: POGO-PIN-8.00-2	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-8.00-2