


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	09/09/13	JAG

SKT3980

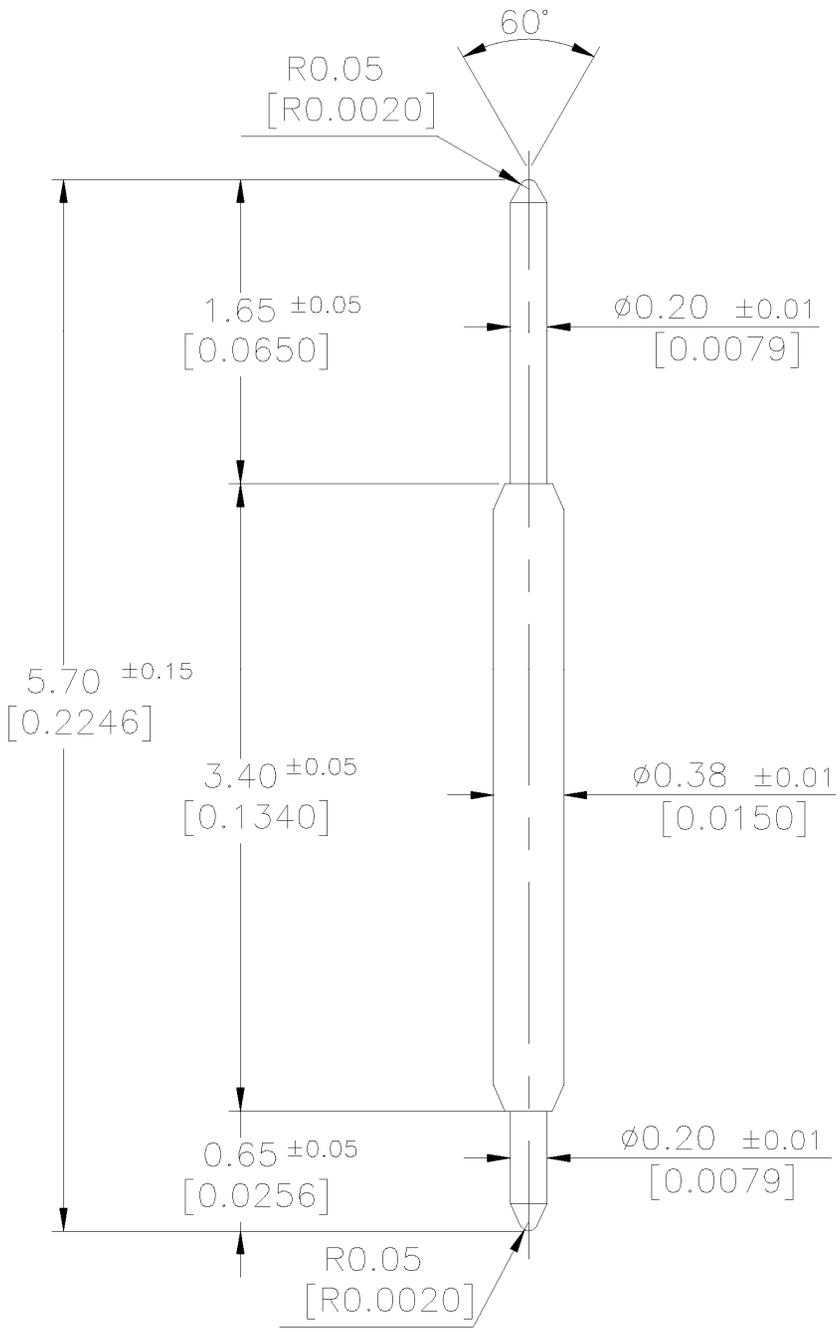

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	12.7 g (0.448 oz)
Recommended Travel	0.75 mm (0.0295)	30.0 g (1.058 oz)
Full Travel	0.80 mm (0.0315)	31.0 g (1.093 oz)

Spring Force: ± 20%

Pointing Accuracy: ± 0.085 mm

PART	MATERIAL	FINISH
Plunger	Hardened Beryllium Copper	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Spring	Music Wire	Gold Plated

DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED
 SPECIFIED TOLERANCES ARE:
 X.X ±0.100MM ANGULAR: X.X° ±1.0°
 X.XX ±0.050MM X.XX° ±0.5°
 X.XXX ±0.025MM

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 VLSI and SMT ADAPTERS and ACCESSORIES

759 FLYNN ROAD
 CAMARILLO, CA 93012
 TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1 DATE: 09/09/13 REVISION: A

CHECKED: PREPARED BY: J. GELACIO ITEM: ASSEMBLY DRAWING

DESCRIPTION: POGO-PIN-5.70-E

DO NOT SCALE DRAWING